

Appendix G.2

VISUAL ASSESSMENT






NORMANDIEN WIND ENERGY FACILITY

VISUAL IMPACT ASSESSMENT FOR THE PROPOSED NORMANDIEN FACILITY

SCOPING PHASE REPORT

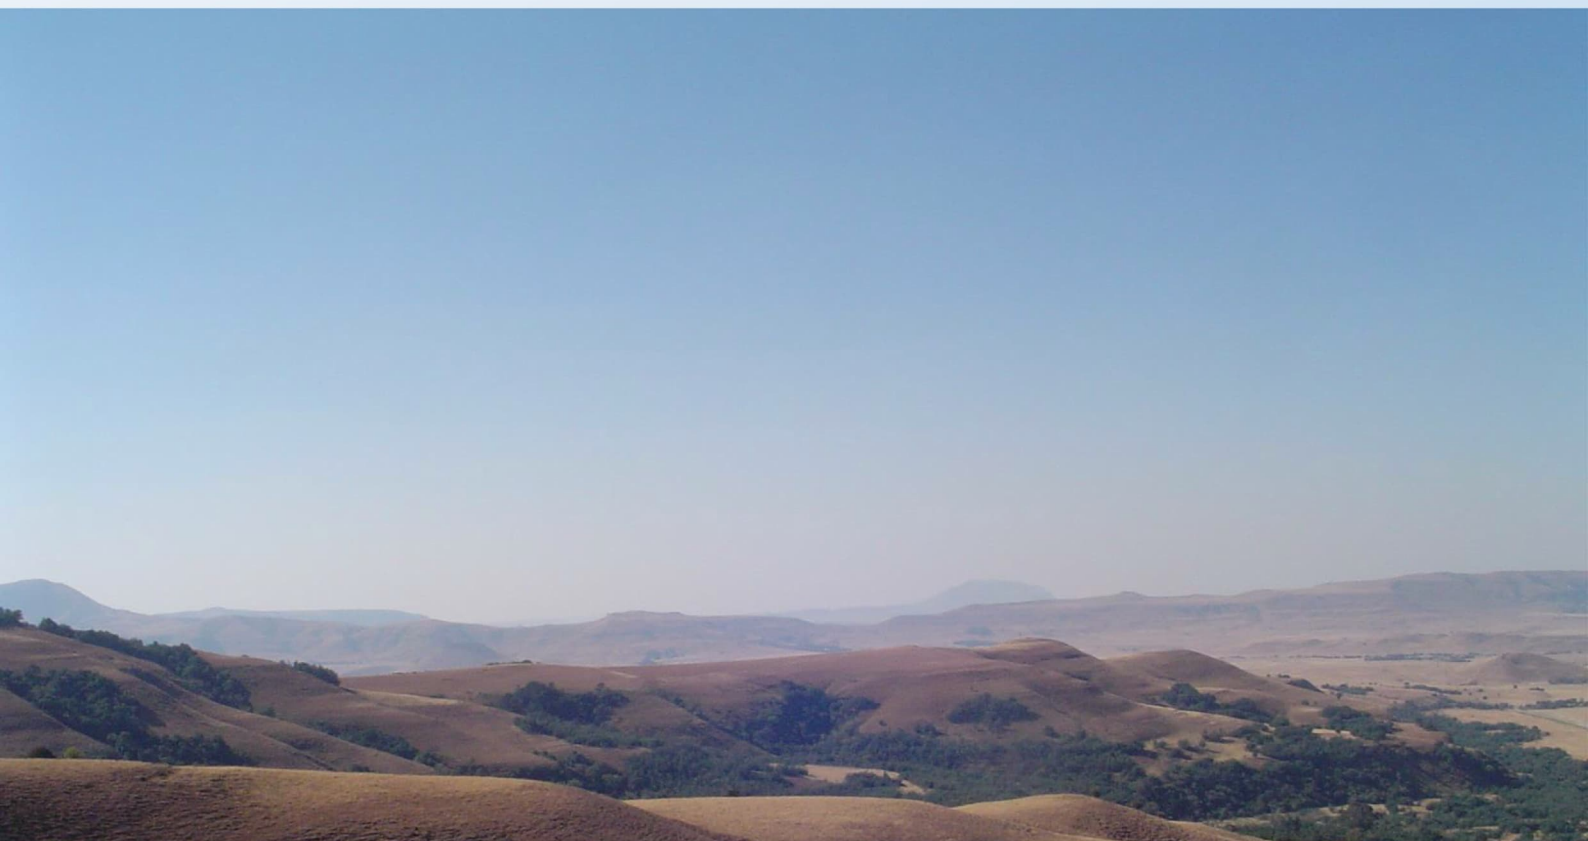



NORMANDIEN WIND ENERGY FACILITY

VISUAL IMPACT ASSESSMENT FOR THE PROPOSED NORMANDIEN FACILITY

SCOPING PHASE REPORT

REPORT (FINAL) CONFIDENTIAL

PROJECT NO. 41106427

OUR REF. NO. 41106427-REP-00004

DATE: OCTOBER 2024



NORMANDIEN WIND ENERGY FACILITY

VISUAL IMPACT ASSESSMENT FOR THE PROPOSED NORMANDIEN FACILITY

SCOPING PHASE REPORT

WSP



Building 1, Maxwell Office Park
Magwa Crescent West, Waterfall City
Midrand, 1685
South Africa

Phone: +27 11 254 4800

WSP.com



QUALITY CONTROL

Issue/revision	First issue	Final
Date	March 2024	October 2024
Prepared by	Johan Bothma	Johan Bothma
Signature		 Digitally signed by Johan Bothma DN: cn=Johan Bothma, c=ZA, o=WSP Group Africa (Pty) LTD, ou=Director: Mine Closure, email=johan.bothma@wsp.com Date: 2024.10.01 15:49:16 +0200
Checked by	Ashlea Strong	Ashlea Strong
Signature		
Authorised by	Johan Bothma	Johan Bothma
Signature		 Digitally signed by Johan Bothma DN: cn=Johan Bothma, c=ZA, o=WSP Group Africa (Pty) LTD, ou=Director: Mine Closure, email=johan.bothma@wsp.com Date: 2024.10.01 15:52:35 +0200
Project number	41106427	41106427
Report number	41106427-REP-000xxx	41106427-REP-00004
File reference		41106427-REP-00004

CONTENTS

1	INTRODUCTION	1
1.1	LOCATION OF THE PROJECT SITE	1
1.2	PROJECT DESCRIPTION	4
1.3	DELINEATION OF THE VISUAL STUDY AREA	6
2	STUDY METHODOLOGY	8
2.1	VIA METHODOLOGY	8
2.1.1	SCOPING PHASE (THIS REPORT):	8
2.1.2	IMPACT ASSESSMENT PHASE:	8
2.2	LEGISLATIVE REQUIREMENTS AND INDUSTRY PRACTICE	9
3	ASSUMPTIONS AND LIMITATIONS	11
4	BASELINE VISUAL ENVIRONMENT	12
4.1	GENERAL LANDSCAPE CHARACTERISTICS	12
4.2	TOPOGRAPHY	12
4.3	HYDROLOGY (DRAINAGE FEATURES)	13
4.4	VEGETATION CHARACTERISTICS	13
4.5	LAND COVER AND LAND USES	14
4.6	SEASONAL AND ATMOSPHERIC CONDITIONS	14
5	VISUAL RESOURCE VALUE OF THE STUDY AREA	15
5.1	ENVIRONMENTAL IMPACT ASSESSMENT SCREENING	15
5.2	VISUAL RESOURCE VALUE CRITERIA	17
5.3	VISUAL RESOURCE VALUE EVALUATION	18
5.4	VISUALLY SENSITIVE AREAS	19

6	VISUAL ABSORPTION CAPACITY	19
6.1	VISUAL ABSORPTION CAPACITY CRITERIA	19
6.2	VISUAL ABSORPTION CAPACITY WEIGHTING FACTOR	19
7	VISUAL RECEPTORS	20
7.1	RECEPTOR GROUPS	20
7.2	RECEPTOR SENSITIVITY	21
7.3	RECEPTOR SENSITIVITY WEIGHTING FACTOR	22
8	PROJECT ALTERNATIVES	22
9	IMPACT ASSESSMENT	23
9.1	IMPACT IDENTIFICATION	23
9.1.1	CONSTRUCTION AND DECOMMISSIONING PHASE IMPACTS	23
9.1.2	OPERATIONAL PHASE IMPACTS	23
9.2	IMPACT MAGNITUDE CRITERIA	24
9.2.1	THEORETICAL VISIBILITY	24
9.2.2	VISUAL INTRUSION	24
9.2.3	VISUAL EXPOSURE	25
9.3	IMPACT MAGNITUDE METHODOLOGY	25
9.4	IMPACT ASSESSMENT RATING METHODOLOGY	26
10	CUMULATIVE IMPACT ASSESSMENT	30
11	PRELIMINARY RECOMMENDED MITIGATION MEASURES	33
12	CONCLUSIONS	35
13	REFERENCES	36

TABLES

Table 1-1 – Farm Portions affected by the proposed Normandien Project	1
Table 2-1 - Appendix 6 of the EIA Regulations specialist study checklist	9
Table 5-1 - Visual resource value criteria	17
Table 5-2 - Visual resource value determination	18
Table 6-1 - VAC weighting factor table	20
Table 7-1 - Visual receptor sensitivity criteria	21
Table 7-2 - Receptor sensitivity criteria weighting factor	22
Table 9-1 - Level of visibility rating	24
Table 9-2 - Impact magnitude points score range and magnitude rating	26
Table 9-3 - Impact Assessment Criteria and Scoring System	27
Table 9-4 – Preliminary impact assessment (pre-mitigation only)	28
Table 10-1 - Projects within 50 km of the Verkykerskop WEF Cluster	30
Table 10-2 – Cumulative visual impacts	32
Table 11-1 - Recommended preliminary mitigation measures for visual impacts	34

FIGURES

Figure 1-1 - Locality map of Normandien Project as part of the Verkykerskop WEF Cluster	3
Figure 1-2 – Location map of the proposed Normandien Project development area	5
Figure 1-3 - The study area (10 km buffer around the Project site) and visual receptors for the Normandien Project visual impact assessment	7
Figure 4-1 – The Normandien site is primarily characterised by a higher-lying plateau area and various spurs and small outcrops, forming a rolling landscape (source Google Earth, photo credit Sjoerd Walda)	13
Figure 4-2 - Aerial photograph of the site and immediate surroundings, illustrating key visual character aspects	14
Figure 4-3 – The predominant vegetation cover is characterised by a marked change in appearance from summer to winter, as grasses change from greens to browns and tans (source: Google Earth, photo credit Sandra and Hennie Cronje)	15
Figure 5-1 - DFFE environmental assessment screening tool - landscape wind theme (21/02/2024)	16



Figure 9-1 - Example of a typical wind farm in a rural setting (Wikipedia, 2023)	23
Figure 9-2 - Visual exposure graph	25
Figure 10-1 - Projects within 50 km of the Verkykerskop WEF Cluster	31
Figure 11-1 - Risk mitigation hierarchy	33

APPENDICES

APPENDIX A

DOCUMENT LIMITATIONS



ABBREVIATIONS

Abbreviations	
BESS	Battery energy storage system
DEM	Digital elevation model
EA	Environmental Authorisation
EIA	Environmental Impact Assessment
ha	Hectares
LTV	Level of theoretical visibility
O&M	Operations and maintenance
SP	Significance points
VAC	Visual absorption capacity
VIA	Visual Impact Assessment
WEF	Wind Energy Facility
WSP	WSP Group Africa (Pty) Ltd

DETAILS OF THE SPECIALIST

Specialist Information	
Name:	Johan Bothma
Cell phone number:	+27 82 803 3882
Telephone number:	+27 11 254 4839
Email:	johan.bothma@wsp.com
Qualifications:	MLArch; PrLArch; SACLAP (20163) - see appended the specialist's full CV

DECLARATION OF INDEPENDENCE BY SPECIALIST

I, Johan Bothma declare that I –

- Act as the independent specialist for the undertaking of a specialist report for the proposed Verkykerskop Wind Energy Facility Normandien Project;
- Do not have and will not have any financial interest in the undertaking of the activity, other than remuneration for work performed;
- Do not have nor will have a vested interest in the proposed activity proceeding;
- Have no, and will not engage in, conflicting interests in the undertaking of the activity; and
- Undertake to disclose, to the competent authority, any information that have or may have the potential to influence the decision of the competent authority or the objectivity of any report, plan, or document.



1 INTRODUCTION

WSP Group Africa (Pty) Ltd (WSP) was appointed to conduct a Visual Impact Assessment (VIA) for the proposed Normandien wind energy facility (WEF) located in the Free State Province.

This VIA forms part of the environmental permitting processes required for the proposed WEF Normandien Project development, and this report presents:

- A visual baseline description of the project site and surrounding landscape.
- A determination of the visual resource value of the proposed project site and surrounding study area and associated sensitivity verification.
- Preliminary identification of:
 - potential visual receptors
 - screening of visual impacts for proposed project activities during the various project phases
 - recommended mitigation measures
- Proposed methodology for impact assessment.

Note that this VIA is for the Normandien Project only, and that the associated grid connection and transmission infrastructure, are the subject of separate permitting process, and therefore also the subjects of separate VIA.

1.1 LOCATION OF THE PROJECT SITE

The proposed Normandien WEF Project, as part of the Verkykerskop WEF Cluster, is located in the Thabo Mofutsanyane District Municipality and Phumelela Local Municipality, near the town of Harrismith, in the Free State Province of South Africa (Figure 1-1).

The details of the property associated with the proposed Normandien Project, including the 21-digit Surveyor General (SG) codes for the cadastral land parcels are outlined in Table 1-1.

Table 1-1 – Farm Portions affected by the proposed Normandien Project

Project	Farm Name	Portion Number	SG 21 code
Normandien WEF	Farm Christina No. 90	0	F01500000000009000000
	Farm Mooiplaats No. 391	0	F015000000000039100000
	Farm Brak Krans No. 554	0	F015000000000055400000
	Farm Cecilia No. 579	0	F015000000000057900000
	Farm Rooi Koppen No. 600	0	F015000000000060000000
	Farm Goedgedacht No. 724	0	F015000000000072400000
	Farm Kruger Wens No.1062	0	F015000000000106200000
	Farm Scotland No. 1238	0	F015000000000123800000



Project	Farm Name	Portion Number	SG 21 code
	Farm Lusthof No.1321	0	F01500000000132100000
	Remaining Extent of the Farm Welgelukt No. 1416	0	F01500000000141600000
	Farm Inzicht No. 1428	0	F01500000000142800000
	Farm Rooibeesberg No. 14898	0	F015000000001489800000
	Portion 1 of Farm Johanna No. 1395	1	F01500000000139500001
	Portion 1 of Farm Bull Hoek No. 329	1	F01500000000032900001
	Portion 1 of Farm Goede Hoop No. 982	1	F01500000000098200001
	Portion 2 of the Farm Driekoppen No. 485	2	F01500000000048500002
	Remaining Extent of portion 3 of the Farm Driekoppen No. 485	3	F01500000000048500003
	Portion 4 of Farm Driekoppen No. 485	4	F01500000000048500004
	Portion 5 of Farm Driekoppen No. 485	5	F01500000000048500005
	Remaining extent of Farm Johanna No. 1395	0	F01500000000139500000
	Remainder Farm Bull Hoek No. 329	0	F01500000000032900000
	Remaining Extent of the Farm Driekoppen No. 485	0	F01500000000048500000

VISUAL IMPACT ASSESSMENT FOR THE PROPOSED NORMANDIEN FACILITY
Project No.: 41106427 | Our Ref No.: 41106427-REP-00004
NORMANDIEN WIND ENERGY FACILITY



1.2 PROJECT DESCRIPTION

The proposed Normandien WEF Project will entail the development of up to 60 wind turbines within a total project area of approximately 6 067 ha, with a combined generation capacity of up to 300 MW. The project will furthermore entail the following development aspects, that are expected to impact the visual landscape:

- Turbines with a hub height of up to 140 m and rotor diameter of up to 200 m.
- Hard standing areas of up to 0.8 ha per turbine.
- Turbine foundations:
 - area of 0.07 ha per turbine and crane platform/pad – 0.5 ha
 - temporary excavation up to 4 m deep, constructed of reinforced concrete to support the mounting ring
 - once the tower is established, the foundation footprint is covered with soil
- Substation - 4 x 33 kV/132 kV onsite collector substation (IPP Portion), each being up to 2 ha.
- Powerlines – 33 kV cabling to connect the wind turbines to the onsite collector substations, to be laid underground where practical.
- Construction camp, site office and laydown area including:
 - Concrete batching plant of up to 1 ha
 - Site office of 4 ha
 - laydown area of 8 ha
- Internal roads of up to 8 m in width.
- O&M office of up to 1 ha.
- Battery energy storage system (BESS) (200 MW/800 MWh).
 - Li-ion solid state batteries
 - export capacity of up to 800 MWh
 - total storage capacity 200 MW
 - storage capacity of up to 6-8 hours
 - The BESS will be housed in containers covering a total approximate footprint of up to 7 ha

The project will also include a main transmission substation, grid connection, and main grid lines and associated towers, however as mentioned these components will be the subject of a separate EA process.

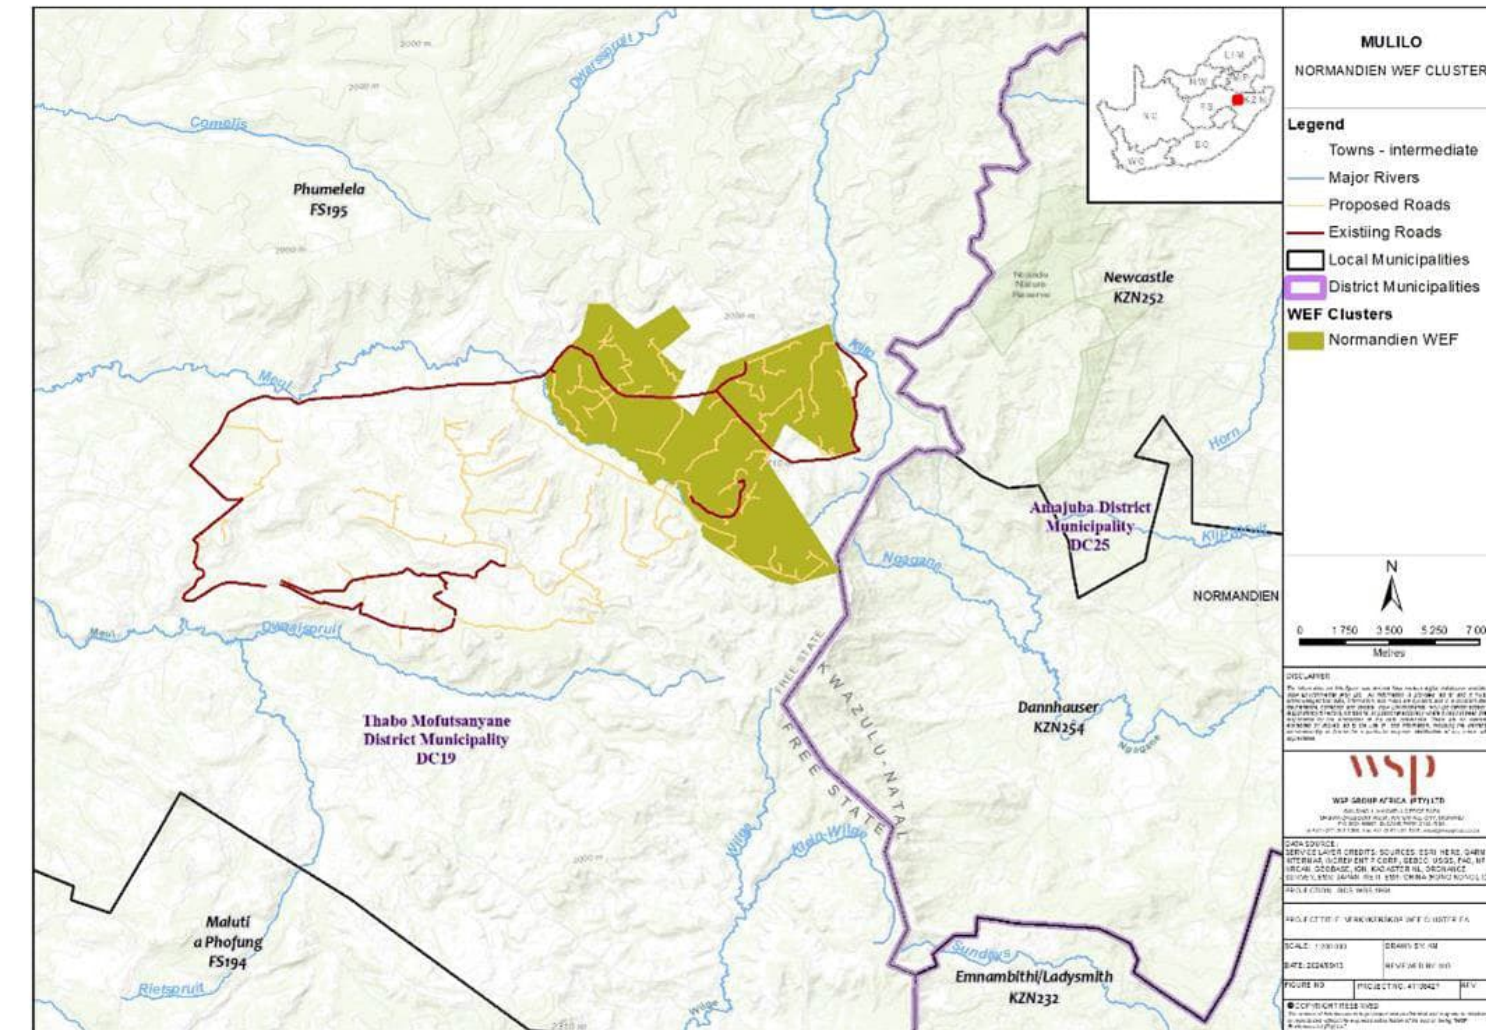


Figure 1-2 – Location map of the proposed Normandien Project development area



The project will entail the development of various components that are expected to result in a potential visual impact, either as temporary impacts during the construction/decommissioning phases, and/or long-term impacts during the operational phase. The preliminary visual impact identification is presented in Section 9.1 and will be further evaluated during the detailed impact assessment phase.

1.3 DELINEATION OF THE VISUAL STUDY AREA

The study area for the VIA comprises the spatial extent of the project footprint and related activities, as well as an associated buffer area.

A visual impact will be caused by all visible infrastructural components as part of the project, as well as all areas where the physical appearance of the landscape will be altered by earthworks and construction activities. The areas from which these proposed landscape alterations are expected to be visible are therefore defined as the study area.

As per WSP's standard methodology developed for VIAs, the study area was defined as a 10 km radius around the physical footprint of the proposed Normandien Project footprint.

- For the purposes of this VIA, the term 'project site' or 'site' refers to proposed Normandien Project footprint
- The term "study area" refers to the area that will potentially be visually affected by the project and represents the 10 km radius buffer around the total project site (shown in Figure 1-3). Visual receptors occurring within the study area are also indicated, and further considered during the impact assessment process (refer to Section 7).

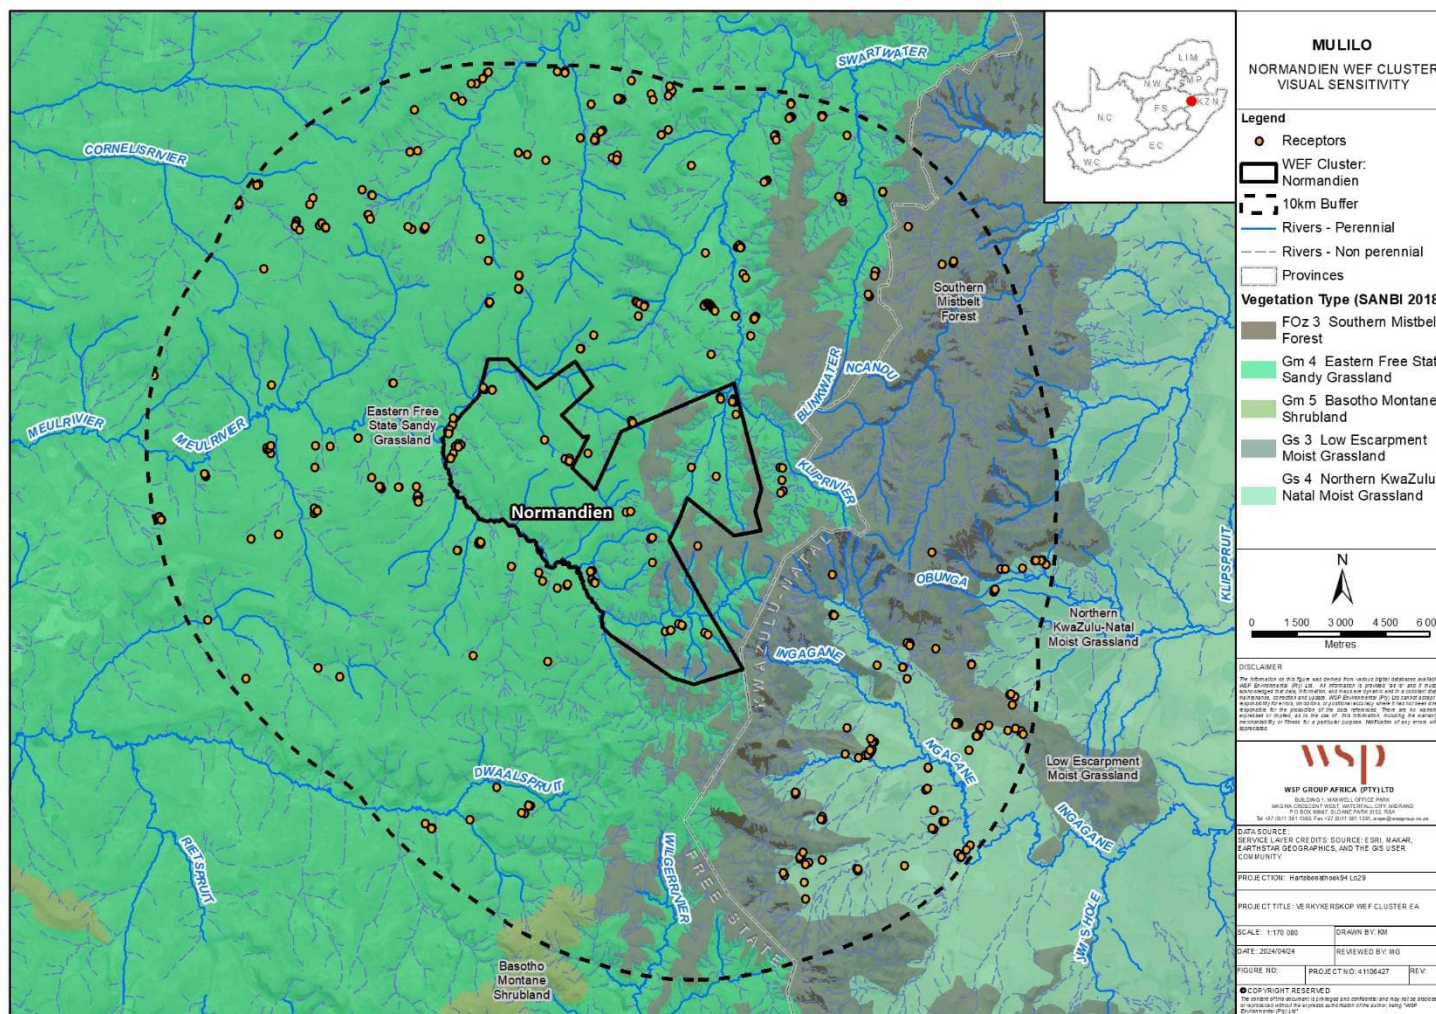


Figure 1-3 - The study area (10 km buffer around the Project site) and visual receptors for the Normandien Project visual impact assessment

2 STUDY METHODOLOGY

2.1 VIA METHODOLOGY

The VIA specialist study is being conducted using the following methodology:

2.1.1 SCOPING PHASE (THIS REPORT):

- Describing the landscape character or visual baseline based on:
 - A review of available aerial imagery and topographical maps, focusing on the both natural- and human-made elements
 - A site visit conducted on 15 March 2024
- Determining the visual resource value of the landscape based on:
 - The topographical character of the study area and potential occurrence of landform features of interest
 - The presence of water bodies within the study area
 - The general nature and level of disturbance of existing vegetation cover within the study area
 - The nature and level of anthropogenic disturbances and transformation
- Determining the sensitivity of the study area regarding visual resource using the national web-based environmental impact assessment screening tool (refer to Section 5.1)
- Determining the visual absorption capacity of the receiving visual landscape
- Determining the receptor sensitivity to the proposed project
- Conducting Screening Assessment for construction, operation and decommissioning phases based on the project description
- Identifying preliminary visual mitigation measures for the impacts identified during the screening assessment
- Performing a preliminary cumulative impact assessment for the project in terms of the existing project study area

2.1.2 IMPACT ASSESSMENT PHASE:

- Evaluating different project alternatives in terms of their anticipated visual impact, as relevant (refer to Section 8)
- Determining the magnitude of potential impacts (refer to Section 9.3) within the existing visual context by considering the proposed project in terms of:
 - Visibility (refer to Section 9.2.1)
 - Visual intrusion (refer to Section 9.2.2)
 - Visual exposure (refer to Section 9.2.3)
- Assessing the impact significance (refer to Section 9.4) by relating the magnitude of the visual impact to:
 - Duration
 - Severity
 - Geographical extent
- Revising the preliminary cumulative impact assessment (refer to Section 10)

- Based on the outcomes of the impact assessment, refining mitigation measures (refer to Section 11) to reduce the potential negative visual impacts of the project, were feasible

2.2 LEGISLATIVE REQUIREMENTS AND INDUSTRY PRACTICE

For the purposes of conducting the VIA, guidance has been taken from the Provincial Government of the Western Cape, Department of Environmental Affairs and Development Planning (DEA&DP) Guideline for Involving Visual and Aesthetic Specialists in the EIA Process (Oberholzer, 2005). These are the only VIA guidelines that have been issued in South Africa. Additional guidance has also been taken from other reference works in the field of visual assessment, list in Section 13.

Further, in accordance with the Procedures for the Assessment and Minimum Criteria for Reporting on identified Environmental Themes, which were promulgated in Government Notice No. 320 of 20 March 2020 and in Government Notice No. 1150 of 30 October 2020 (i.e. “the Protocols”), and Appendix 6 of the EIA Regulations. The protocols used are the “*Site Sensitivity Verification Requirements where a specialist Assessment is required but no Specific Assessment Protocol has been Prescribed*”, which are referenced to the report content as indicated in Table 2-1:

Table 2-1 - Appendix 6 of the EIA Regulations specialist study checklist

Report content requirement	Reference
A specialist report prepared in terms of these Regulations must contain—	
(a) details of— (i) the specialist who prepared the report; and (ii) the expertise of that specialist to compile a specialist report including a curriculum vitae;	Refer to details of the specialist section after the table of contents
(b) a declaration that the specialist is independent in a form as may be specified by the competent authority;	Refer to declaration of independence by specialist after the table of contents
(c) an indication of the scope of, and the purpose for which, the report was prepared; (cA) an indication of the quality and age of base data used for the specialist report; (cB) a description of existing impacts on the site, cumulative impacts of the proposed development and levels of acceptable change;	Refer to Sections 1 and 2 Refer to Section 2 Refer to Section 4.1 for a description of existing impacts on site, cumulative impacts will be assessed during the impact assessment phase
(d) the duration, date and season of the site investigation and the relevance of the season to the outcome of the assessment;	Refer to Section 2 for information regarding the date and season, and Sections 3 and 4.6 for relevance of seasonal influences on assessment outcome
(e) a description of the methodology adopted in preparing the report or carrying out the specialised process inclusive of equipment and modelling used;	Refer to Section 2.1 for methodology, as well as Section 9.2.1 for specialised process of viewshed analysis to follow during impact assessment

Report content requirement	Reference
(f) details of an assessment of the specific identified sensitivity of the site related to the proposed activity or activities and its associated structures and infrastructure, inclusive of a site plan identifying site alternatives;	Refer to Section 5
(g) an identification of any areas to be avoided, including buffers;	Refer to Sections 5.1 and 5.4
(h) a map superimposing the activity including the associated structures and infrastructure on the environmental sensitivities of the site including areas to be avoided, including buffers;	The development layout will be finalised at the end of the scoping phase, and will be superimposed on visual sensitivities map and further evaluated during the impact assessment phase
(i) a description of any assumptions made and any uncertainties or gaps in knowledge;	Refer to Section 3
(j) a description of the findings and potential implications of such findings on the impact of the proposed activity or activities;	Initial findings regarding visual resource value, receptor sensitivity, identified impacts and mitigation are presented as elsewhere indicated in this table, and will be further evaluated during impact assessment
(k) any mitigation measures for inclusion in the EMPr;	Refer to Section 10 for preliminary mitigation measures, which will be further evaluated during impact assessment
(l) any conditions for inclusion in the environmental authorisation;	None noted yet, will be further evaluated during impact assessment
(m) any monitoring requirements for inclusion in the EMPr or environmental authorisation;	None noted yet, will be further evaluated during impact assessment
(n) a reasoned opinion— (i) whether the proposed activity, activities or portions thereof should be authorised; (iA) regarding the acceptability of the proposed activity or activities; and (ii) if the opinion is that the proposed activity, activities or portions thereof should be authorised, any avoidance, management and mitigation measures that should be included in the EMPr, and where applicable, the closure plan;	None noted yet, will be further evaluated during impact assessment. Refer to Section 10 for the proposed visual mitigation strategy and preliminary measures
(o) a description of any consultation process that was undertaken during the course of preparing the specialist report;	No consultation was conducted, however the study was conducted using widely acknowledged principles of visual assessment as noted in Section 9.2
(p) a summary and copies of any comments received during any consultation process and where applicable all responses thereto; and	None received yet
(q) any other information requested by the competent authority	None received yet

Report content requirement	Reference
(2) Where a government notice gazetted by the Minister provides for any protocol or minimum information requirement to be applied to a specialist report, the requirements as indicated in such notice will apply.	Not applicable

3 ASSUMPTIONS AND LIMITATIONS

The following qualification is relevant to the field of VIA and the findings of this study:

- The layout of individual project components, specifically the locations of individual wind turbines, O&M building, substation, BESS, and temporary batching plants have not been finalised yet, and the findings of this VIA are based on the available preliminary development description. Initial recommendations regarding the location of specific project infrastructure, including potential “no-go” areas, visual impacts associated with the project and proposed mitigation measures as included in this report, are therefore preliminary in nature and will be revised and updated during the impact assessment phase
- Similarly, selection of specific technology has not been finalised in all instances. However, in most cases the specific choice of technology is not expected to materially influence the findings of the impact assessment, as the height and location of individual turbines are expected to be the most determining factor during the visual impact assessment
- Artificial landforms and structures, such as berms, stockpiles, buildings, and even tall vegetation will all impact the level of visibility of individual project components. However, given the limited development within study area the influence of these elements during the viewshed analysis to be conducted during the impact assessment phase is expected to be limited
- Determining the value, quality and significance of a visual resource or the significance of the visual impact that any activity may have on it, in absolute terms, is not achievable. The value of a visual resource is partly determined by the viewer and is influenced by that person’s socio-economic, cultural, and individual background, and is even subject to fluctuating and intangible factors, such as emotional mood and appreciation of “sense of place”
- This situation is compounded by the fact that the conditions under which the visual resource is viewed can change dramatically due to natural phenomena, such as weather conditions and seasonal change. Visual impact cannot therefore be measured simply and reliably, as is for instance the case with water, noise, or air pollution
- It is therefore not possible to conduct a visual assessment without relying to some extent on the expert opinion of a qualified consultant, which is inherently subjective. The subjective opinion of the visual consultant is however unlikely to materially influence the findings and recommendations of this study, as a wide body of scientific knowledge exists in the industry of VIA, on which findings are based

4 BASELINE VISUAL ENVIRONMENT

The visual baseline presented in this section is predicated on site observations, as well as Google Earth imagery. To determine the visual resource value of the study area, the following factors were considered:

- General topography, including prominent or appealing landforms, and their spatial orientation relative to the project site
- Nature of existing vegetation cover with respects to overall appearance, density and height, and level of disturbance
- Location, physical extent, and appearance of water bodies, and
- Nature and level of anthropogenic transformation or disturbance and the perceived level of compatibility of existing land uses

This section provides a brief overview of the visual baseline environment and context in which the proposed project will take place.

4.1 GENERAL LANDSCAPE CHARACTERISTICS

The project site in the Free State Province is roughly 30 km southwest of Newcastle and 50 km northeast of Harrismith, and partially abuts the border of KwaZulu-Natal, within the Grassland Biome. The region is largely rural and undeveloped in character, and land uses are primarily crop production, livestock farming and other agricultural uses, with vast areas still characterised by primary grassland and associated vegetation communities. Settlements most settlements in the region are small, with Newcastle, Harrismith and Ladysmith being the only notable exceptions.

The study area visual baseline is further described in the following subsections and illustrated by various maps and photos.

4.2 TOPOGRAPHY

The natural topography of much of the vicinity is characterised by expansive rolling plateaus, contrasted by distinct escarpments and low cliff faces and ridges, various wide and narrower valleys that have been carved by a comprehensive network of watercourses, and several isolated and more prominent outcrops form distinct visual landmarks.

The topography of the Normandien Project site is primarily characterised by a higher-lying plateau and various spurs and small outcrops, which have been incised by narrow valleys that drain towards the south, west and north (Figure 4-1). The southern site boundary is formed by the watercourse that also is the lowest part of the site. The valley floors are between 100 m and 200 m lower than the surrounding plateaus, which are edged by steep and rocky cliffs.



Figure 4-1 – The Normandien site is primarily characterised by a higher-lying plateau area and various spurs and small outcrops, forming a rolling landscape (source Google Earth, photo credit Sjoerd Walda)

4.3 HYDROLOGY (DRAINAGE FEATURES)


The Verkykerskop WEF Cluster is located within the Upper Wilge River Catchment Area, with the regional topography having been sculpted by a complex network of watercourses, and generally draining towards the west and north. The Highveld Escarpment also forms a prominent watershed along the eastern edge of the Normandien Project area, from where the region generally drains to the east. The Normandien Project site is bounded to the south by one of the upper tributaries of the Wilge River, which is characterised by a narrow, somewhat incised stream channel that meanders and curls through a deep valley.

However, from a visual perspective these watercourses are not particularly prominent, especially when viewed from some distance away, as they tend to easily be obscured by small rises in elevation and the surrounding vegetation and are also identified by the often-eroded channel sides than visible or standing water. Almost no farm dams have been constructed in any of the watercourses, and these waterbodies are also small and not prominent in the landscape.

4.4 VEGETATION CHARACTERISTICS

Large parts of the greater region and Normandien Project site itself are still characterised by original primary grassland vegetation communities, which is visually punctuated by expansive stretches of often dense shrubland occurring along the steeper slopes and rocky areas, as well as bordering most of the drainage channels and in the narrower valleys. Isolated clumps of indigenous willow (*Salix mucronata*) and exotic willow (*Salix babylonica*) occurring along the southern site boundary also form local focal points and add interest in short-range views. Markedly, there few areas of typical alien tree species invasion (i.e. eucalyptus, wattle, or poplar) anywhere within the site boundary, and with limited clumps of exotic trees also having been planted in the farmstead and other building cluster areas.

The visual context of the project site is distinctly rural and is primarily untransformed and natural in character, and areas of development and active human use are limited. Importantly, none of the few manmade structures protrude above the very characteristic horizon and are therefore not visually dominant and blend into the surrounding landscape.



A further aspect of the visual baseline that needs to be considered is that of weather-related/atmospheric conditions and seasonal variations. Prevailing atmospheric conditions can greatly influence how a landscape is perceived by viewers, as well as the range over which views are possible.

The study area is located in a summer rainfall region, while winters are cold and mostly dry. Mist is common particularly during winter, greatly reducing visibility when it is present. Airborne pollution in the region is limited, but high humidity or smoke from fires often result in hazy atmospheric conditions. Fires can also significantly impact visual conditions, causing vast and highly visible smoke columns which greatly reduce visibility in short-range views.

In addition, seasonal changes greatly change the appearance of most landscapes, with the region typically alternating from vast expanses of various hues of green during the rainy season, to more subdued browns and tans during the winter (Figure 4-3). Croplands also change in appearance, from bare earth at the start of the spring planting season to visually uniform fields of corn during summer, which gradually brown and yellow during autumn before harvesting, following which the fields are again characterised by exposed earth and bare stalks.



Figure 4-3 – The predominant vegetation cover is characterised by a marked change in appearance from summer to winter, as grasses change from greens to browns and tans (source: Google Earth, photo credit Sandra and Hennie Cronje)

5 VISUAL RESOURCE VALUE OF THE STUDY AREA

5.1 ENVIRONMENTAL IMPACT ASSESSMENT SCREENING

The DFFE preliminary environmental impact assessment screening indicates that large parts of the Normandien WEF study area are of very high or high visual resource value, and that the areas of least concern are located along the lower-lying valley (Figure 5-1). This information informed the visual resource value evaluation performed, following the observations made during site visit (Section 5.3).

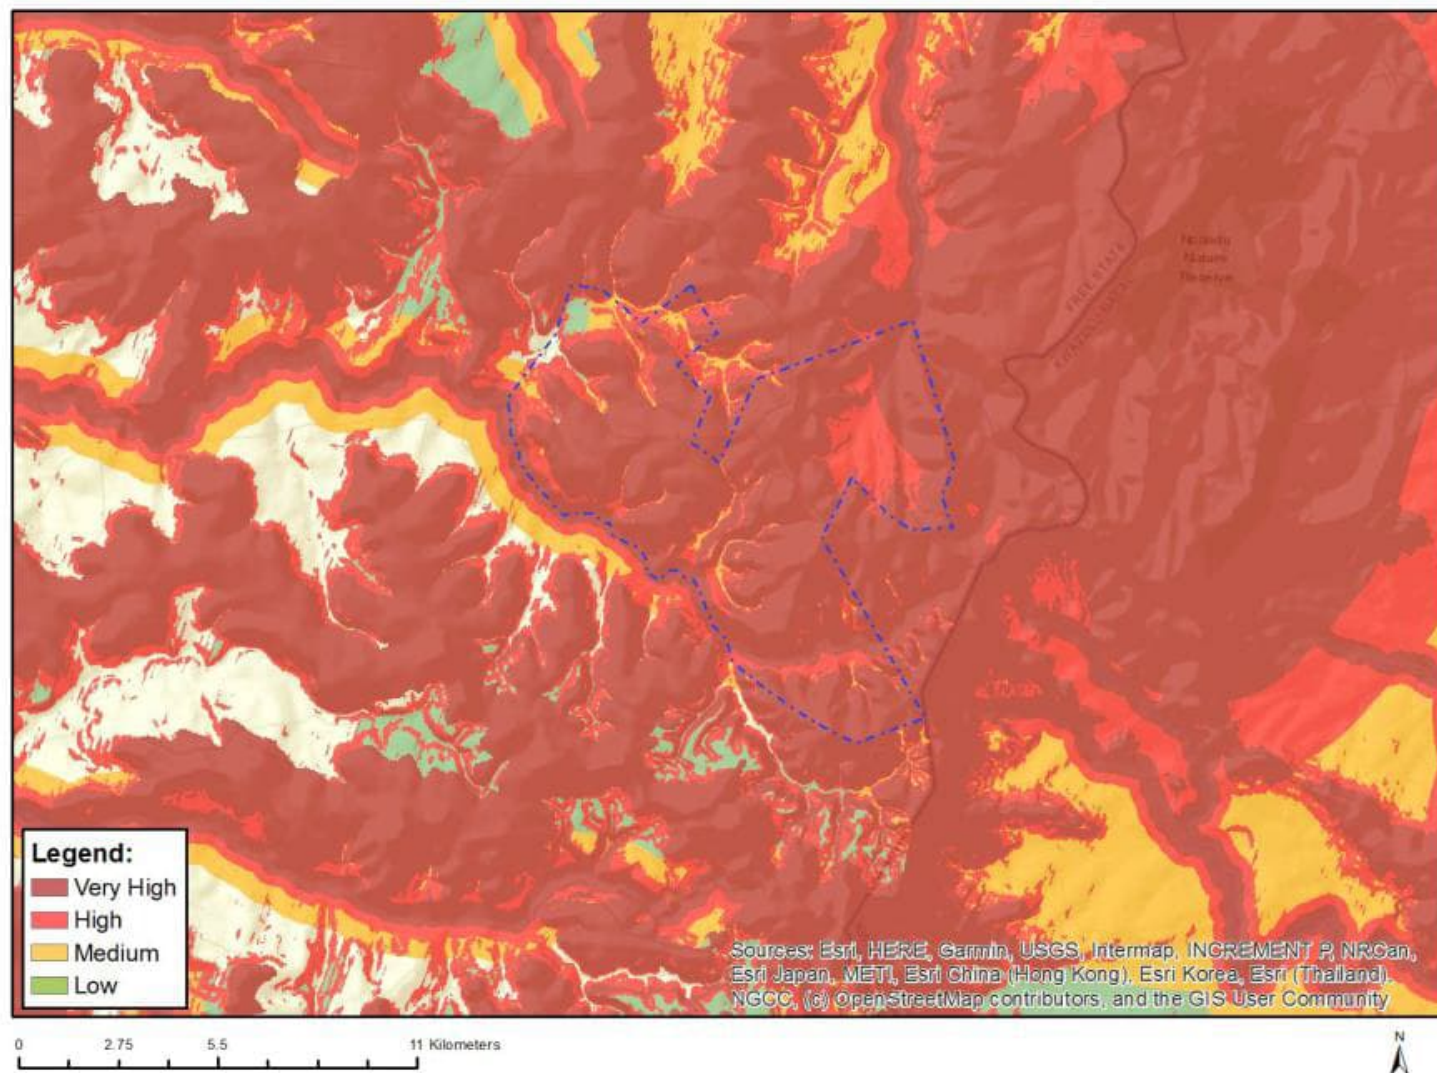


Figure 5-1 - DFFE environmental assessment screening tool - landscape wind theme (21/02/2024)

5.2 VISUAL RESOURCE VALUE CRITERIA

Visual resource value refers to the visual quality of elements of an environment, as well as the way in which combinations of elements in an environment appeal to our senses. Studies in perceptual psychology have shown an affinity for landscapes with a higher visual complexity, rather than homogeneous ones (Young, 2004). Furthermore, based on research of human visual preference (Crawford, 1994), landscape quality increases when:

- Prominent topographical features and rugged horizon lines exist.
- Water bodies such as streams or dams are present.
- Untransformed indigenous vegetation cover dominates, and
- Limited presence of human activity, or land uses that are not visually intrusive or dominant prevail.

Further to these factors, Table 5-1 indicates criteria used for visual resource assessment. The assessment combines visual quality attributes (views, sense of place and aesthetic appeal) with landscape character and gives the landscape a very high, high, moderate, or low visual resource value.

A review of the national web-based environmental impact assessment screening tool indicates that the site is not considered sensitive regarding the visual resource. Nonetheless, it recommends that a visual impact assessment be conducted as part of the environmental assessment process.

Table 5-1 - Visual resource value criteria

Visual Resource Value (sensitivity)	Criteria
Very high (4)	<ul style="list-style-type: none"> ■ Pristine or near-pristine natural landscape with no or very limited human intervention visible ■ Natural landscapes characterised by highly scenic or attractive features that are unique to the area or region ■ Areas that exhibit a strong positive character with valued features that combine to elicit a distinct experience of visual unity, richness, and harmony ■ Cultural heritage sites, architectural features, or built-up sites comprised completely or mostly consisting of elements of high historical or social value, and that are unique or otherwise characterised by high visual appeal ■ These landscapes are likely of particular importance to conserve, and are particularly sensitive to change
High (3)	<ul style="list-style-type: none"> ■ Predominantly natural landscapes that nevertheless have some human interventions visible ■ Natural landscapes characterised by scenic or attractive natural features, characteristic of the region in which it is located ■ Areas comprised of visual elements that mostly combine to create a sense of visual unity, richness, and harmony, with minor or isolated incongruent aspects of features ■ Cultural heritage sites, architectural features, or built-up sites largely characterised by features of high historical or social value, and that mostly have high visual appeal ■ These are landscapes may contain specific features or elements of conservation importance, and which may be sensitive to change
Moderate (2)	<ul style="list-style-type: none"> ■ Partially transformed or disturbed landscape in which human interventions are visible but do not dominate views ■ Natural landscapes but with noticeable presence of incongruous elements or degradation of some features

Visual Resource Value (sensitivity)	Criteria
	<ul style="list-style-type: none"> Areas that exhibit some positive visual appeal but that are not unique and are found elsewhere, or that include some disharmonious elements resulting in a more mixed character Cultural heritage sites, architectural features, or built-up sites characterised by individual elements that have some socio-cultural or historic interest but not considered visually unique These landscapes are less important to conserve but may still include certain areas or features worthy of conservation, and have some capacity to absorb visual change
Low (1)	<ul style="list-style-type: none"> Extensively transformed or disturbed landscape Human intervention is of visually intrusive nature and dominates available views Scenic appeal of landscape greatly compromised, and visual cohesion of individual elements is mostly non-existent Built-up sites in which unappealing elements have visual prominence, or that consist of widely disparate or incongruous land uses and activities Areas generally negative in character with few, if any, valued features. Scope for positive enhancement frequently occurs

5.3 VISUAL RESOURCE VALUE EVALUATION

A summary of the visual resource value of the study area *vis-à-vis* the tabulated factors is discussed below:

- The natural topography of the study area in general and site itself is distinct and central to the visual character of the region, with many features of visual interest. The Normandien site topography is largely characterised by many plateau, spur and outcrop areas and a marked drop-off to the south and east, although there are fewer uniquely prominent landmarks than adjacent areas, and the visual resource value of this attribute is therefore rated as high (3).
- The hydrological features of the site are less prominent than the other Verkykerskop WEF sites, although they still form focal elements of interest in short- to medium-range views and are usually associated with prominent changes in elevation. This aspect of the landscape is therefore considered to be of high (3) visual resource value.
- Given that nationally only a fraction of the once expansive original Highveld grasslands remain, and the further threat posed by mining, agriculture, urban expansion, and associated degradation, the visual resource value of the essentially untransformed nature of the site's vegetation cover is rated as very high (4).
- The largely natural state of the site and limited agricultural land uses, within the context of the larger study area, results in this attribute being of a very high visual resource value (4).

The visual resource value assessment of the site within the context of the study area, in terms of the above criteria scores, is summarised in Table 5-2:

Table 5-2 - Visual resource value determination

Visual baseline attribute	Topography	Water bodies	Vegetation	Land uses
Visual resource value score	3	3	4	4
Total				14 (very high)



Where:

- 4 – 6 = low
- 7 – 9 = moderate
- 10 – 13 = high
- 14-16 = very high

Based on the above score ranges, the overall visual resource value and sensitivity of most of the site, within the context of the surrounding study area, is rated as very high.

5.4 VISUALLY SENSITIVE AREAS

Based on the above assessment, from a visual perspective the following areas should be avoided to the greatest extent possible when situating any of the project infrastructure, which includes the individual wind turbines, internal transmission lines, BESS, as well as temporary features such the concrete batching plant, construction camps, and laydown areas:

- Along the tops of ridges and outcrops or along the escarpment edges, as this would fundamentally change the visual character of these features
- Within delineated wetlands and immediately adjacent to watercourses and dams, as the loss of natural vegetation cover would detract from the visual resource value of the area
- Furthermore, where possible and within the constraints of safety and practical constraints, preference should be given to locating the project infrastructure in the vicinity of existing infrastructure, including near roads, powerlines, or along the edges of cropland areas

6 VISUAL ABSORPTION CAPACITY

6.1 VISUAL ABSORPTION CAPACITY CRITERIA

Visual absorption capacity (VAC) can be defined as an “estimation of the capacity of the landscape to absorb development without creating a significant change in visual character or producing a reduction in scenic quality” (Oberholzer, 2008). The ability of a landscape to absorb development or additional human intervention is primarily determined by the nature and occurrence of vegetation cover, topographical character, and human structures.

A further major factor is the degree of visual contrast between the proposed new project and the existing elements in the landscape. If, for example, a visually prominent industrial development already exists in an area, the capacity of that section of landscape to visually “absorb” additional industrial structures is higher than that of a similar section of landscape that is still in its natural state. VAC is therefore primarily a function of the existing land use and cover, in combination with the topographical ruggedness of the study area and immediate surroundings.

Based on the very limited degree of landscape transformation of the site within the study area, the characteristic topography and visually unbroken horizon skyline, and overall lack of vertical manmade elements, the VAC of the site is rated as low.

6.2 VISUAL ABSORPTION CAPACITY WEIGHTING FACTOR

To account for the fact that visual impacts are expected to be more intrusive in landscapes with a lower VAC than in those with a higher VAC (regardless of the visual quality of the landscape), a



weighting factor is incorporated into the impact magnitude determination, as indicated in Table 6-1. A higher weighting factor is applied to areas with a low VAC to account for the increased visual impact.

Table 6-1 - VAC weighting factor table

Visual resource value of receiving landscape	Low VAC	Medium VAC	High VAC
High/very high resource value	High (1.2)	High (1.2)	Moderate (1.0)
Medium resource value	High (1.2)	Moderate (1.0)	Low (0.8)
Low visual resource value	Moderate (1.0)	Low (0.8)	Low (0.8)

The visual resource value of the study area has been determined to be very high (refer to section 5), while the VAC of the study area has been rated as low (see above). Hence, a high (1.2) weighting factor in terms of VAC is applied during the impact assessment.

7 VISUAL RECEPTORS

7.1 RECEPTOR GROUPS

Visual impact is primarily concerned with human interest. Potential viewers, or visual receptors, thus constitute people that might see and be affected by the proposed development. Receptor sensitivity refers to the degree to which an activity is expected to impact receptors, and depends on:

- the various groups of people (visual receptor groups) that occur within the project study area
- how many people will see and be impacted by the project
- how frequently they are expected to be exposed to the project
- their perceptions regarding the aesthetics of the existing visual context

Visual receptors of the proposed project can be broadly categorised into two main groups, namely:

- people who live or work in the area, and who will be continuously or frequently exposed to the project components (resident receptors)
- people who travel through the area and are only temporarily exposed to the project components (transient receptors)

Receptors in the study area potentially include the following groups:

- residents of the various farmsteads and smallholdings on or within viewing distance of the site, and workers at these establishments (resident receptors)
- people living or working at or visiting the isolated tourist destinations that occur around the site (resident and transient receptors)
- residents of and visitors to the towns and associated settlements potentially within sight of the site (resident and transient receptors)
- other travellers along the various national and regional roads, and other asphalt and gravel roads surrounding the site (transient receptors)

The degree to which these receptors will be impacted by the project will be dependent on the level of visibility of the project components within the project study area, which will be further assessed during the impact assessment phase.

7.2 RECEPTOR SENSITIVITY

The visual receptor sensitivity and incidence can be classified as high, moderate, or low, as indicated in Table 7-1.

Table 7-1 - Visual receptor sensitivity criteria

Number of people that will see the project (incidence factor)	
Large	Towns and cities, along major national roads (e.g. thousands of people)
Moderate	Villages, typically less than 1 000 people
Small	Less than 100 people (e.g. a few households)
Receptor perceived landscape value (sensitivity factor)	
High	People attach a high value to aesthetics, such as in or around a game reserve or conservation area, and the project is perceived to impact significantly on this value of the landscape.
Moderate	People attach a moderate value to aesthetics, such as smaller towns, where natural character is still plentiful and in close range of residency.
Low	People attach a low value to aesthetics, when compared to employment opportunities, for instance. Environments have already been transformed, such as cities and towns.

The following ratings have been applied to the identified visual receptor groups:

- Resident receptors: Resident receptors comprise a relatively small number of people (incidence factor) living and/or working in the study area. We advance that considering the low existing levels of development associated with the rural setting, most people in this receptor group will probably attach a high value (vulnerability factor) to the visual appearance of the project site.
- Transient receptors: People travelling through the study area will include residents, itinerant workers, regional tourists, and people on route to towns in the area, or destinations elsewhere. Given the proximity of numerous (albeit small) towns and the fact that the site borders KwaZulu Natal and many popular tourist destinations further to the east, it is likely that at least a moderate number of people (incidence factor) could see the site on a frequent basis. It can be assumed that different people within this receptor group will have widely divergent views on the value of the site and surroundings as visual resource, which will largely be determined by their relation to the area. To account for this degree of variability, it is assumed that this group on a whole will on average attach at least a moderate degree of value to the proposed project site (vulnerability factor).

Based on the above, a moderate number of people (incidence factor) are expected to be visually affected by the project, and that the perceived landscape value (vulnerability factor) is expected to vary from moderate to high, depending on the relationship of the individual receptor with the area.

7.3 RECEPTOR SENSITIVITY WEIGHTING FACTOR

To determine the magnitude of a visual impact, a weighting factor that accounts for receptor sensitivity is determined (Table 7-2), based on the number of people that are likely to be exposed to a visual impact (incidence factor) and their expected perception of the value of the visual landscape and project impact (vulnerability factor).

Table 7-2 - Receptor sensitivity criteria weighting factor

Receptor perceived landscape value (vulnerability factor)	Number of people that will see the project (incidence factor)		
	Large	Moderate	Small
High	High (1.2)	High (1.2)	Moderate (1.0)
Moderate	High (1.2)	Moderate (1.0)	Low (0.8)
Low	Moderate (1.0)	Low (0.8)	Low (0.8)

Based on the receptor sensitivity assessment and the above criteria, a high weighting factor (1.2) in terms of this aspect will be applied during the impact magnitude determination.

8 PROJECT ALTERNATIVES

Potential layout alternatives will be developed at the end of the Scoping Phase for assessment in the EIA Phase. However, in principle, from a visual perspective the preferred layout for the Verkykerskop WEF Normandien Project would be one where the turbines are (to the extent possible) clustered rather than spread out and located in the vicinity of farmland and existing linear infrastructure, including power lines and roads. Further, where possible, locating the turbines near the edges of ridges, within delineated wetland areas, or within proximity of any of the larger water bodies should be avoided.

The alternative of utilising ready-mix concrete trucks instead of the temporary cement batching plant would be favoured, as the batching plant would for the duration of its presence negatively impact the visual character of the area in which it is located. Furthermore, it is reasonable to assume that the appearance of the area in which the plant is located would be permanently altered to some degree despite the implementation of rehabilitation measures.

From a visual perspective, the “no-go” alternative, i.e. whereby the Normandien Project will not be developed, will be further investigated in the EIA phase. The no-go alternative would mean that none of the project elements that may be deemed visually detrimental would be introduced into the landscape and thereby retaining the existing visual character and associated resource value of the project site. It is noted that the project area has very low existing levels of development, a distinct and definable rural character, and high visual resource value of the ridges and low cliffs that characterise the site. It is also unlikely that significant visual mitigation could be implemented should the project proceed, given the great height of the turbines and the nature of the project technology.

9 IMPACT ASSESSMENT

9.1 IMPACT IDENTIFICATION

The following potential visual impacts that may occur during the construction, operational and decommissioning/closure phases of the project were identified. The expected visual impacts of the construction and decommissioning phases will be assessed together, as they will largely be the same, albeit with the latter essentially occurring in reverse:

9.1.1 CONSTRUCTION AND DECOMMISSIONING PHASE IMPACTS

- Presence of visually intrusive construction/decommissioning related activities and equipment in the landscape.
- Airborne dust due to construction/decommissioning activities and resultant dust settling onto surrounding landscape.

9.1.2 OPERATIONAL PHASE IMPACTS

- Reduction in visual resource value due presence of visually intrusive wind turbines and other project infrastructure in the landscape. Figure 9-1 provides an indication of the appearance of typical wind turbines in a hilly rural landscape setting.
- Glare due to sunlight reflection from smooth surfaces, as well as flicker from spinning turbine blades.
- Light pollution at night due to safety lighting on top of turbines, and security lighting.



Figure 9-1 - Example of a typical wind farm in a rural setting (Wikipedia, 2023)

9.2 IMPACT MAGNITUDE CRITERIA

The magnitude of a visual impact will be determined in the impact assessment phase by considering the visual resource value and VAC of the landscape in which the project will take place, and the receptors potentially affected by it, together with the level of visibility of the project components, their degree of visual intrusion and the potential visual exposure of receptors to the project, as further elaborated on below:

9.2.1 THEORETICAL VISIBILITY

The level of theoretical visibility (LTV) is defined as the sections of the study area from which the proposed project infrastructure may be visible and will be performed during impact assessment. This will be determined during the impact assessment phase by conducting a viewshed analysis and using Esri ArcGIS for Desktop software, 3D Analyst Extension (Geographic Information System software with three-dimensional topographical modelling capabilities).

The basis of a viewshed analysis is a Digital Elevation Model (DEM). The DEM for this viewshed analysis will be derived from contour sets for the site if available, as well as national 5 m contour lines. A 10 km study area surrounding the site will be used for the analysis. The viewshed will be developed for the proposed turbines assuming a “worst-case” scenario height of 240 m, which accounts for the 140 m tower height, and 100 m individual blade length. The viewshed analysis will be generated from representative turbines, the locations of which will be established in the layout to be finalised at the end of the scoping phase.

Artificial landforms and structures, such as berms, stockpiles, buildings, and indeed tall vegetation (particularly alien tree windrows and plantations) are not reflected in the DEM. However, given largely uniform, low vegetation height and the limited development and within study area and the great height of the turbines, the influence of these factors on the results of the viewshed analysis will be negligible. The LTV based on the results of the viewshed analysis will then be rated according to Table 9-1.

Table 9-1 - Level of visibility rating

Level of theoretical visibility of project element	Visibility rating
Less than a quarter of the total project study area	Low (1)
Between a quarter and half of the study area	Moderate (2)
More than half of the study area	High (3)

9.2.2 VISUAL INTRUSION

Visual intrusion deals with how well the project components fit into the ecological and cultural aesthetic of the landscape as a whole. An object will have a greater negative impact on scenes considered to have a high visual quality than on scenes of low quality because the most scenic areas have the “most to lose”. The visual impact of a proposed landscape alteration also decreases as the complexity of the context within which it takes place, increases. If the existing visual context of the site is relatively simple and uniform any alterations or the addition of human-made elements tend to be very noticeable, whereas the same alterations in a visually complex and varied context do not attract as much attention. Especially as distance increases, the object becomes less of a focal point because there is more visual distraction, and the observer's attention is diverted by the complexity of the scene (Hull and Bishop, 1998). The expected level of visual intrusion of each of the project components will be evaluated based on these factors during impact assessment.

9.2.3 VISUAL EXPOSURE

The visual impact of a development diminishes at an exponential rate as the distance between the observer and the object increases – refer to Figure 9-2. Relative humidity and fog in the area directly influence the effect. Increased humidity causes the air to appear greyer, diminishing detail. Thus, the impact at 1 000 m would be 25% of the impact as viewed from 500 m. At 2 000 m it would be 10% of the impact at 500 m. The inverse relationship of distance and visual impact is well recognised in visual analysis literature (Hull and Bishop, 1998) and was used as important criteria for this study.

Thus, visual exposure is an expression of how close receptors are expected to get to the proposed interventions on a regular basis. For the purposes of this assessment, close range views (equating to a high level of visual exposure) are views over a distance of 500 m or less, medium-range views (equating to a moderate/medium level of visual exposure) are views of 500 m to 2 km, and long-range views are over distances greater than 2 km (low levels of visual exposure). The level of visual exposure of the turbines and other infrastructure will be evaluated within this context during impact assessment.

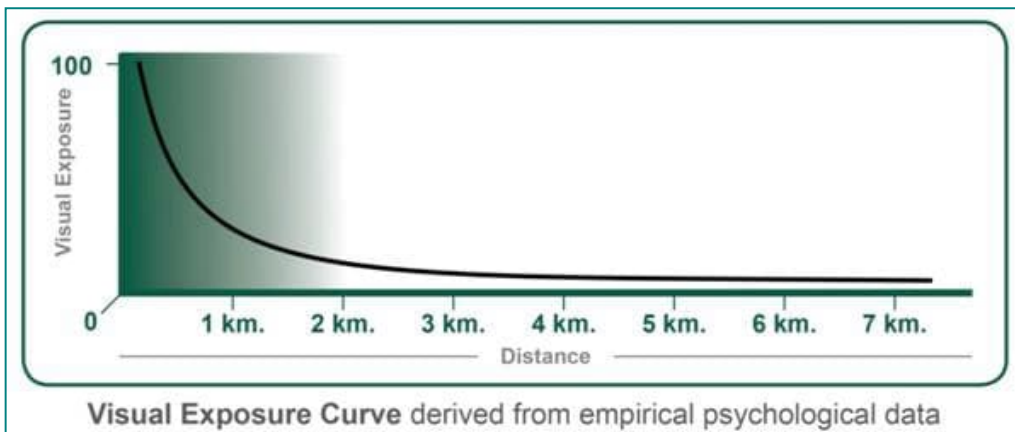


Figure 9-2 - Visual exposure graph

9.3 IMPACT MAGNITUDE METHODOLOGY

The expected impact magnitude of the proposed project will be rated, based on the above assessment of the visual resource value of the site, as well as level of visibility, visual intrusion, visual exposure and receptor sensitivity as visual impact criteria. The process is summarised below:

$$\text{Magnitude} = [(\text{Visual quality of the site} \times \text{VAC factor}) \times (\text{Visibility} + \text{Visual Intrusion} + \text{Visual Exposure})] \times \text{Receptor sensitivity factor.}$$

$$\text{Thus: } [(1 \times \text{Factor } 1.0) \times (1 + 1 + 1)] \times \text{Factor } 1 = 3.$$

From the above equation the maximum magnitude point (MP) score is 51.8 points. The possible range of MP scores is then categorised in terms of magnitude rating as indicated in Table 9-2.

Table 9-2 - Impact magnitude points score range and magnitude rating

MP score	Magnitude rating
>34.5	Very High: Permanent cessation of processes
26 - 34.5	High: Processes temporarily cease
17.5 – 25.9	Medium: Processes continue but in a modified way
9 – 17.4	Low: Slight impact on processes
<8.9	Very low: No impact on processes

9.4 IMPACT ASSESSMENT RATING METHODOLOGY

The assessment of impacts and mitigation evaluates the likely extent and significance of the potential impacts on identified receptors and resources against defined assessment criteria, to develop and describe measures that will be taken to avoid, minimise or compensate for any adverse environmental impacts, to enhance positive impacts, and to report the significance of residual impacts that occur following mitigation, as relevant/feasible.

The key objectives of the risk assessment methodology are to identify any additional potential environmental issues and associated impacts likely to arise from the proposed project, and to propose a significance ranking. Issues / aspects will be reviewed and ranked against a series of significance criteria to identify and record interactions between activities and aspects, and resources and receptors to provide a detailed discussion of impacts. The assessment will consider the following impacts:

- direct - impacts that arise directly from activities that form an integral part of the Project.
- indirect - impacts that arise indirectly from activities not explicitly forming part of the Project.
- secondary - induced impacts caused by a change in the Project environment.
- cumulative - impacts are those impacts arising from the combination of multiple impacts from existing projects, the Project and/or future projects.

A standard risk assessment methodology is used for the ranking of the identified environmental impacts pre-and post-mitigation (i.e. residual impact). The significance of environmental aspects is determined and ranked by considering the criteria presented in Table 9-3. The definitions given are for guidance only, and not all the definitions will apply to all the environmental receptors and resources being assessed. Impact significance was assessed with and without mitigation measures in place.

A standard risk assessment methodology is used for the ranking of the identified environmental impacts pre-and post-mitigation (i.e. residual impact). The significance of environmental aspects is determined and ranked by considering the criteria presented in below:

Table 9-3 - Impact Assessment Criteria and Scoring System

CRITERIA	SCORE 1	SCORE 2	SCORE 3	SCORE 4	SCORE 5
Impact Magnitude (M) The degree of alteration of the affected environmental receptor	Very low: No impact on processes	Low: Slight impact on processes	Medium: Processes continue but in a modified way	High: Processes temporarily cease	Very High: Permanent cessation of processes
Impact Extent (E) The geographical extent of the impact on a given environmental receptor	Site: Site only	Local: Inside activity area	Regional: Outside activity area	National: National scope or level	International: Across borders or boundaries
Impact Reversibility (R) The ability of the environmental receptor to rehabilitate or restore after the activity has caused environmental change	Reversible: Recovery without rehabilitation		Recoverable: Recovery with rehabilitation		Irreversible: Not possible despite action
Impact Duration (D) The length of permanence of the impact on the environmental receptor	Immediate: On impact	Short term: 0-5 years	Medium term: 5-15 years	Long term: Project life	Permanent: Indefinite
Probability of Occurrence (P) The likelihood of an impact occurring in the absence of pertinent environmental management measures or mitigation	Improbable	Low Probability	Probable	Highly Probability	Definite
Significance (S) is determined by combining the above criteria in the following formula:	$[S = (E + D + R + M) \times P]$ $Significance = (Extent + Duration + Reversibility + Magnitude) \times Probability$				
IMPACT SIGNIFICANCE RATING					
Total Score	4 to 15	16 to 30	31 to 60	61 to 80	81 to 100
Environmental Significance Rating (Negative (-))	Very low	Low	Moderate	High	Very High
Environmental Significance Rating (Positive (+))	Very low	Low	Moderate	High	Very High

A preliminary impact assessment (pre-mitigation only) of the screening level visual impacts identified at present has been conducted as summarised in Table 9-4. The impact assessment will be refined, and will include post-mitigation ratings, once the viewshed analysis modelling and other evaluations in terms of the criteria presented in Section 9.2 has been completed.



Table 9-4 – Preliminary impact assessment (pre-mitigation only)

Impact number	Aspect	Description	Stage	Character	Ease of Mitigation	Pre-Mitigation						
						(M+	E+	R+	D)x	P=	S	Rating
CONSTRUCTION AND DECOMMISSIONING												
Impact 1:	Airborne dust	Airborne dust due to construction/decommissioning activities and resultant dust settling onto surrounding landscape	Construction/ decommissioning	Negative	moderate	3	3	3	1	4	40	N3
Significance						N3 - Moderate						
Impact 2:	Construction activities	Presence of visually intrusive construction/decommissioning related activities and equipment in the landscape	Construction/ decommissioning	Negative	moderate	3	3	3	2	5	55	P3
Significance						P3 - Moderate						
OPERATIONAL												
Impact number	Aspect	Description	Stage	Character	Ease of Mitigation	Pre-Mitigation						
						(M+	E+	R+	D)x	P=	S	
Impact 1:	Presence of turbines, other infrastructure	Reduction in visual resource value due to presence of visually intrusive wind turbines and other project infrastructure in the landscape	Operational	Negative	Poor	5	3	3	4	5	75	P4
Significance						P4 - High						
Impact 2:	Glare, flicker	Glare due to sunlight reflection from smooth surface, and flicker from painted blades	Operational	Negative	Poor	5	3	3	4	4	60	P3
Significance						P3 - Moderate						



Impact number	Aspect	Description	Stage	Character	Ease of Mitigation	Pre-Mitigation						
						(M+	E+	R+	D)x	P=	S	Rating
Impact 3:	Light pollution	Light pollution at night due to turbine safety and project site security lighting	Operational	Negative	Poor	5	3	3	4	5	75	P4
Significance						P4 - High						

10 CUMULATIVE IMPACT ASSESSMENT

A cumulative impact assessment is the process of (a) analysing the potential impacts and risks of proposed developments in the context of the potential effects of other human activities and natural environmental and social external drivers on the chosen Valued Environmental and Social Components (VECs) over time, and (b) proposing concrete measures to avoid, reduce, or mitigate such cumulative impacts and risk to the extent possible (IFC GPH).

Cumulative impacts with existing and planned facilities may occur during construction and operation of the proposed Verkykerskop WEF Cluster. While one project may not have a significant negative impact on sensitive resources or receptors, the collective impact of the projects may increase the severity of the potential impacts.

Therefore, several projects within the surrounding area which have submitted applications for environmental authorisation (some of which have been approved) have been considered. The projects considered are from the latest REEA database from the DFFE (2023 Quarter 3). It is important to note that the existence of an approved EA does not directly equate to actual development of the project.

The proposed Verkykerskop WEF Cluster is not located within one of the promulgated Renewable Energy Development Zones (REDZ). The projects located within a 50 km radius of the site that should be considered in the cumulative impact assessment is included in Table 10-1, and illustrated in Figure 10-1. Projects beyond a 50 km radius are not being evaluated as part of this VIA, as developments beyond this distance fall well outside of the range of cumulative visibility.

Table 10-1 - Projects within 50 km of the Verkykerskop WEF Cluster

Project name	Applicant	Status	Reference number	Distance away (km)
Newcastle Gas Engine Power Plant (NGEPP), Newcastle, KwaZulu-Natal Province.	Newcastle Energy (Pty) Ltd	Refused	14/12/16/3/3/2/2074	36
Proposed Upgrade of Karbochem boilers and electricity project in Newcastle	Distributed Energy Generation (Pty) Ltd	In process	14/12/16/3/3/1/1164	37
Proposed Upgrade of Karbochem boilers and electricity project in Newcastle - Amendment	Distributed Energy Generation (Pty) Ltd	Approved	14/12/16/3/3/1/1164/AM1	37
Proposed Newcastle solar energy facility near Newcastle, KwaZulu-Natal Province	Building Energy (Pty) Ltd	Refused	14/12/16/3/3/1/1225	38
Proposed Newcastle WEF 2 and associated grid infrastructure near	Mulilo Newcastle Wind Power 2 (Pty) Ltd	Refused	14-12-16-3-3-2-2213	32

Project name	Applicant	Status	Reference number	Distance away (km)
Newcastle, KwaZulu-Natal Province				
Proposed Newcastle WEF and associated grid infrastructure near Newcastle, KwaZulu-Natal Province	Mulilo Newcastle Wind Power (Pty) Ltd	Approved	14-12-16-3-3-2-2457	35
Proposed Newcastle WEF 2 and associated grid infrastructure near Newcastle, KwaZulu-Natal Province	Mulilo Newcastle Wind Power (Pty) Ltd	Approved	14-12-16-3-3-2-2457	32

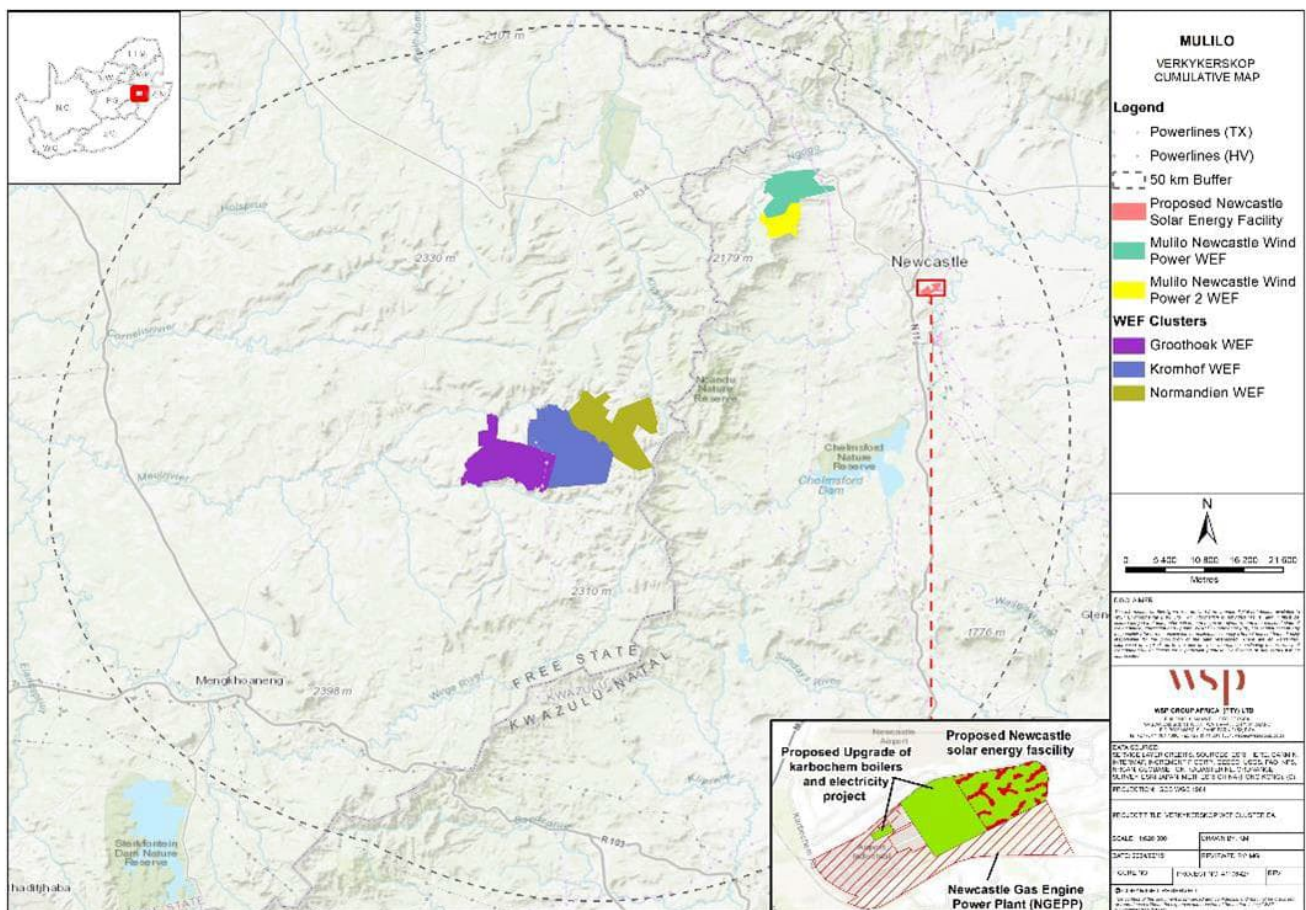


Figure 10-1 - Projects within 50 km of the Verkyerskop WEF Cluster

The region is predominantly a rural and agricultural landscape, although Newcastle, Harrismith and several other small towns occur within the cumulative impact assessment study area. Currently, the cumulative impact assessment study area is essentially devoid of projects similar in appearance to the proposed Normandien WEF, noting that two further wind turbine and one electric boiler projects approved within this area are expected to cause similar impacts to that of the Normandien project.



The visual impact associated with the proposed Normandien WEF project will entail the introduction of a highly visible renewable energy generation infrastructure into the visual landscape, thereby transforming a notable additional section of the mostly rural, agricultural study area towards energy generation. The cumulative effect together with that of the various other proposed renewable projects if developed, will partially alter the existing rural character of the study area, which may act as catalyst for further similar development in the vicinity. The cumulative visual impact of the project is assessed below:

- **Magnitude:** Currently a limited number of future projects of a similar nature may take place in the region, and it is highly unlikely that these will be within visible distance of the Normandien WEF project. Only a relatively small percentage of the overall project footprint area will physically be transformed as part of the project, which in turn will encompass a small percentage of the 50 km radius cumulative impact assessment study area, although from a visual perspective the development will be visible from within a larger percentage of the cumulative impact assessment study area. For these reasons, the magnitude of the cumulative visual impact of the project is currently estimated to be low (2).
- **Extent:** The cumulative visual impact will be of regional scale (3), as the impact will extend beyond the site boundaries to the regional surroundings but is not expected to be significant on a larger (i.e. provincial) scale.
- **Reversibility:** The visual impacts associated with the project once constructed will persist and remain unchanged for the entire duration of the operation phase, as will be the case with other projects of a similar nature if approved, and in most instances limited to no mitigation (depending on the impact) is likely to be feasible, and therefore deemed irreversible (5).
- **Duration:** As this is an operational-phase impact that will be present for the lifespan of the project, the duration has been rated as long-term (4).
- **Probability:** Given the relative distance of the other proposed renewable developments from the Normandien WEF site, the probability of a cumulative visual impact caused by the presence of the project infrastructure in the landscape has been rated as probable of occurring (3).

Table 10-2 – Cumulative visual impacts

Phase	Potential cumulative visual impacts	Visual significance					
		M	E	R	D	P	S
Operational phase	Alteration of the existing rural character of the study area through the introduction of an expanse and visually prominent infrastructure into the landscape	2	3	5	4	3	42 (moderate)

Based on the above assessment, the cumulative visual impact of the project is expected to be on the lower end of moderate and will be confirmed once the detailed impact assessment has been completed.

11 PRELIMINARY RECOMMENDED MITIGATION MEASURES

The impact significance without mitigation measures will be re-assessed with the design controls in place. Impacts without mitigation measures in place are not representative of the proposed development's actual extent of impact and are included to facilitate understanding of how and why mitigation measures were identified. The residual impact is what remains following the application of mitigation and management measures and is thus the final level of impact associated with the development. Residual impacts also serve as the focus of management and monitoring activities during Project implementation to verify that actual impacts are the same as those predicted in this report.

The mitigation measures chosen are based on the mitigation sequence/hierarchy which allows for consideration of five different levels, which include avoid/prevent, minimise, rehabilitate/restore, offset and no-go in that order. The idea is that when project impacts are considered, the first option should be to avoid or prevent the impacts from occurring in the first place if possible, however, this is not always feasible. If this is not attainable, the impacts can be allowed, however they must be minimised as far as possible by considering reducing the footprint of the development for example so that little damage is encountered. If impacts are unavoidable, the next goal is to rehabilitate or restore the areas impacted back to their original form after project completion. Offsets are then considered if all the other measures described above fail to remedy high/significant residual negative impacts. If no offsets can be achieved on a potential impact, which results in full destruction of any ecosystem for example, the no-go option is considered so that another activity or location is considered in place of the original plan.

The mitigation sequence/hierarchy is shown in Figure 11-1.

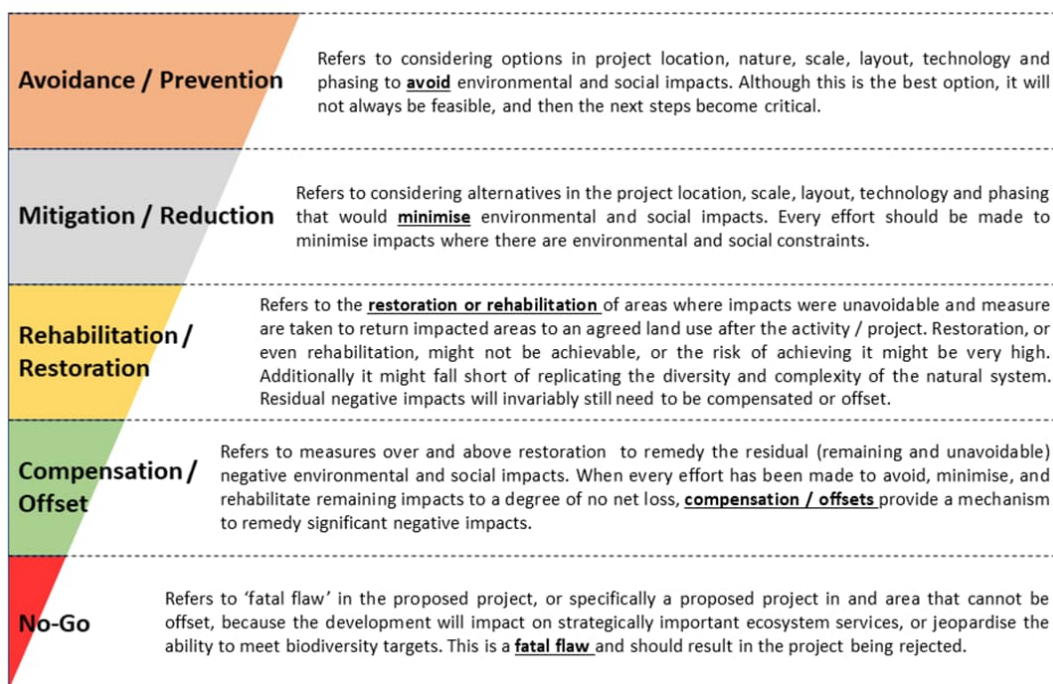


Figure 11-1 - Risk mitigation hierarchy



Where avoidance is not possible, visual mitigation for operational facilities can be approached in two ways, and usually a combination of the two methodologies is most effective. The first option is to implement measures that attempt to reduce the visibility of the sources of a visual impact. Thus, an attempt is made to "hide" the source of the visual impact from view, by placing visually appealing elements between the viewer and the source of the visual impact. The second option aims to minimise the degree or severity of the visual impact itself, and usually involves altering the source of the impact in such a way that it is smaller in physical extent and/or less intrusive in appearance.

In the case of the Verkykerskop WEF Normandien Project, visual mitigation options are largely limited to the construction and decommissioning phases due to several factors, i.e.:

- The vast horizontal scale of the project infrastructure.
- The requirement for unobstructed access to wind flow, and space constraint posed by the large blade diameter.
- Technology and operational requirements and constraints.

The proposed visual mitigation measures for the construction and decommissioning, and operational phases respectively, are presented in Table 11-1.

Table 11-1 - Recommended preliminary mitigation measures for visual impacts

Component	Mitigation measures
Construction and decommissioning phases	
Airborne dust due to construction/decommissioning activities and resultant dust settling onto surrounding landscape	Dust control: <ul style="list-style-type: none">■ Water down construction roads and large bare areas as frequently as is required to minimise airborne dust■ Enforce a 40 km/h speed limit on site for all vehicles■ Monitor dust fallout if any complaints are received, using appropriate dust monitoring programme
Presence of visually intrusive construction/decommissioning related activities and equipment in the landscape	Site management: <ul style="list-style-type: none">■ Ensure all construction areas are appropriately maintained and kept in tidy order■ Reduce the number and size of material laydown and waste storage areas to the extent feasible, and barricade these from view with shade netting/similar if needed■ Remove accumulated waste material and unused equipment from site as frequently as is feasible■ Repair unsightly and ecologically detrimental erosion damage to steep or bare slopes as soon as possible and re-vegetate these areas using a suitable mix of indigenous grass species
Operational phase	
Reduction in visual resource value due to presence of visually intrusive wind turbines and other project infrastructure in the landscape	<ul style="list-style-type: none">■ Employ micro-siting and orientation of turbines and other infrastructure to group with existing infrastructure and already disturbed areas
Glare due to sunlight reflection from smooth surface, and flicker from painted blades	<ul style="list-style-type: none">■ Employ micro-siting and orientation adjustment of individual towers to ensure glare and flicker impacts to resident receptors (on-site and adjacent landowners) or transient receptors (roads bordering the site) are reduced

Component	Mitigation measures
Light pollution at night due to turbine safety and project site security lighting	<ul style="list-style-type: none"> ■ Utilise security lighting that is movement activated rather than permanently switched on, to prevent unnecessary constant illumination ■ Plan the lighting requirements of the facilities to ensure that lighting meets the need to keep the site secure and safe, without resulting in excessive illumination ■ Reduce the height and angle of illumination from which lights are fixed as much possible while still maintaining the required levels of illumination ■ Identify zones of high and low lighting requirements, focusing on only illuminating areas to the minimum extent possible to allow security surveillance ■ Avoid up-lighting of structures by rather directing lighting downwards and focussed on the area to be illuminated ■ Fit all security lighting with 'blinkers' or specifically designed fixtures, to ensure light is directed downwards while preventing side spill. Light fixtures of this description are commonly available for a variety of uses and should be used to the greatest extent possible

12 CONCLUSIONS

The project site is located in a rural setting, with limited areas of low-impact agricultural activity. The study area is sparsely populated with only farmsteads, isolated tourist attractions and small settlements occurring here, and the larger towns located further away from the site. As such, the potential visual receptor base to the proposed development is somewhat limited but diverse. Furthermore, the visual resource value of the site within the context of the surrounding study area is very high, owing mainly to the low prevailing levels of development, highly characteristic topography, and largely intact Highveld grassland cover, and furthermore also has a low ability to absorb visual change.


The proposed project will introduce numerous very tall and highly visible elements into the landscape, in the form of the turbines, as well as other associated support infrastructure. The presence of these elements will influence the prevailing rural character of the study area and may either be perceived as contributing or be deemed visually detrimental within the context of the existing visual setting, depending on the predisposition of individual receptors. Limited visual mitigation is likely to be feasible and mainly relevant to the construction and decommissioning phases, as proposed in Section 11. The significance of the identified visual impacts will be further evaluated during the impact assessment, and proposed mitigation measures revised/refined where required.

13 REFERENCES

- Crawford, D. (1994). *Using remotely sensed data in landscape visual quality assessment*, *Landscape and Urban Planning*, 30, pp. 71–81.
- Mucina, L., & Rutherford, M. (2006). *The Vegetation of South Africa, Lesotho and Swaziland*. Pretoria: South African National Biodiversity Institute (SANBI): Strelitzia.
- Oberholzer, B. (2008). *Guideline for involving visual and aesthetic specialists in EIA processes*, *DEA Visual Guideline, Edition 1*.
- Rueter, G. (2021, July 26). *Where do large solar power plants pay off?* Retrieved from DW: <https://www.dw.com/en/desert-large-solar-plants-also-pay-off-in-countries-with-less-sun/a-58284114>
- SBC . (2009). *SPOT Building Count*.
- Wikipedia. (2023, 10 25). *Wikipedia*. Retrieved from Starfish Hill Wind Farm: https://en.wikipedia.org/wiki/Starfish_Hill_Wind_Farm#/media/File:Starfish_Hill_windfarm,_Cape_Jarvis.JPG
- Young, G. (2004). *Visual impact assessment for proposed long-term coal supply to Eskom's Majuba NLA*. Johannesburg.

Appendix A

DOCUMENT LIMITATIONS





DOCUMENT LIMITATIONS

This document has been provided by WSP Group Africa Pty Ltd ("WSP") subject to the following limitations:

- i) This Document has been prepared for the particular purpose outlined in WSP's proposal and no responsibility is accepted for the use of this Document, in whole or in part, in other contexts or for any other purpose.
- ii) The scope and the period of WSP's Services are as described in WSP's proposal, and are subject to restrictions and limitations. WSP did not perform a complete assessment of all possible conditions or circumstances that may exist at the site referenced in the Document. If a service is not expressly indicated, do not assume it has been provided. If a matter is not addressed, do not assume that any determination has been made by WSP in regard to it.
- iii) Conditions may exist which were undetectable given the limited nature of the enquiry WSP was retained to undertake with respect to the site. Variations in conditions may occur between investigatory locations, and there may be special conditions pertaining to the site which have not been revealed by the investigation and which have not therefore been taken into account in the Document. Accordingly, additional studies and actions may be required.
- iv) In addition, it is recognised that the passage of time affects the information and assessment provided in this Document. WSP's opinions are based upon information that existed at the time of the production of the Document. It is understood that the Services provided allowed WSP to form no more than an opinion of the actual conditions of the site at the time the site was visited and cannot be used to assess the effect of any subsequent changes in the quality of the site, or its surroundings, or any laws or regulations.
- v) Any assessments made in this Document are based on the conditions indicated from published sources and the investigation described. No warranty is included, either express or implied, that the actual conditions will conform exactly to the assessments contained in this Document.
- vi) Where data supplied by the client or other external sources, including previous site investigation data, have been used, it has been assumed that the information is correct unless otherwise stated. No responsibility is accepted by WSP for incomplete or inaccurate data supplied by others.
- vii) The Client acknowledges that WSP may have retained sub-consultants affiliated with WSP to provide Services for the benefit of WSP. WSP will be fully responsible to the Client for the Services and work done by all its sub-consultants and subcontractors. The Client agrees that it will only assert claims against and seek to recover losses, damages or other liabilities from WSP and not WSP's affiliated companies. To the maximum extent allowed by law, the Client acknowledges and agrees it will not have any legal recourse, and waives any expense, loss, claim, demand, or cause of action, against WSP's affiliated companies, and their employees, officers and directors.
- viii) This Document is provided for sole use by the Client and is confidential to it and its professional advisers. No responsibility whatsoever for the contents of this Document will be accepted to any person other than the Client. Any use which a third party makes of this Document, or any reliance on or decisions to be made based on it, is the responsibility of such third parties. WSP accepts no responsibility for damages, if any, suffered by any third party because of decisions made or actions based on this Document.



Building 1, Maxwell Office Park
Magwa Crescent West, Waterfall City
Midrand, 1685
South Africa

wsp.com